



069-64318



Accessories



That's Kränzle: Better perfect... than cheap!

Industrial vacuum

cleaners





The Ufo serves to perfectly clean larger surfaces such as swimming pools but also porches and

driveways.

PRO TIP!



Mobile, compact and practical

The portable

The portable Kränzle high-pressure cleaners are distinguished by their convenient and compact design as well as their robust everyday suitability.



HD 10/122 with Dirtkiller

	HD 7/122	HD 10/122
Ord. no.	41,730 1	41,731 1
Operating pressure, continuously adjustable	30-120 bar (3-12 MPa)	30-120 bar (3-12 MPa)
Max. admissible overpressure	135 bar (13.5 MPa)	135 bar (13.5 MPa)
Water output	7 l/min (420 l/h)	10 l/min (600 l/h)
Motor speed	1,400 rpm	2,800 rpm
Connected load	230 V, 7.5 A, 50 Hz	230 V, 11.0 A, 50 Hz

- Absolutely convenient, spacesaving and compact design

- The most quiet professional appliances of their class due to a four-pin slow running motor (1,400 rpm) (HD 7/122)



Features & Equipment

Steel braided high-pressure hose, 10 m (NW 6), trigger gun with safety catch M2000, Dirtkiller lance with stainless steel pipe, stainless steel lance with flat jet nozzle

Everything clean in a jiffy

The small power packs

The Kränzle 1132 is designed to flawlessly clean any type of surface around your home, yard and garden in no time. The K 1132 is equipped with an all-terrain and stair climbing trolley and thus qualifies for universal use.

With the UFO floor cleaner also enables efficient cleaning of large surfaces such as porches or driveways.



- 5 m power lead with cable reel
- Storages for trigger gun with safety catch and lances
- Low pressure detergent

Product characteristics



- Efficient surface cleaning without spraying water
- Ø 300 mm





	-
Ord. no.	41,240
Operating pressure, continuously adjustable	30-130 bar (3-13 MPa)
Max. admissible overpressure	150 bar (15 MPa)
Water output	10 l/min (600 l/h)
Motor speed	2,800 rpm
Connected load	230 V, 12.0 A, 50 Hz

Features & Equipment

Steel braided high-pressure hose, 10 m (NW 6), trigger gun with safety catch M2000, Vario-Jet lance with stainless steel pipe





PRO TIP!

Dirtkiller lance for rapid removal of even the toughest dirt within no time. As regards the Kränzle K 1152 TS T this lance is included in the comprehensive standard equipment.



- Single-part Roto-Mold-chassis and therefore extremely stable and robust
- Integrated trolley takes steps and rough ground in its stride
- Integrated hose drum with foldable crank
- 5 m power lead with cable reel
- Storages for trigger gun with safety catch and lances
- Easy-Start
- Total-Stop system
- Low pressure detergent



Powerful, compact and convenient

private users.

The small power packs

The small power packs are Kränzle's response to

customers' demand for high capacity, all-terrain

Due to its integrated neat arrangement system

everything is under control at any time.

and stair climbing cold water high pressure cleaners

and enjoy great acceptance among quality oriented

K 1152 TS T

K 1152 TS T

Ord. no.	41,218 1
Operating pressure, continuously adjustable	30-130 bar (3-13 MPa)
Max. admissible overpressure	150 bar (15 MPa)
Water output	10 l/min (600 l/h)
Motor speed	2,800 rpm
Connected load	230 V, 12.0 A, 50 Hz

Features & Equipment

Steel braided high-pressure hose, 15 m (NW 6), trigger gun with safety catch M2000, Dirtkiller lance with stainless steel pipe, Vario-Jet lance with stainless steel pipe



The K 2000 series

The Kränzle K 2000 line is perfectly geared to your various requirements of highly powerful pressure cleaning machines.

Designed, of course, with the roto-mold trolley, and with integrated hose drum according to model and dirt killer and vario jet lance as a standard including practical neat arrangement for efficient handling during operation.

For more information:





	K 2100 13 I	K 2195 13 1
Ord. no.	41,781 1	41,785 1
Operating pressure, continuously adjustable	30-140 bar (3-14 MPa)	30-180 bar (3-18 MPa)
Max. admissible overpressure	160 bar (16 MPa)	195 bar (19.5 MPa)
Water output	11 l/min (660 l/h)	8 l/min (480 l/h)
Motor speed	1,400 rpm	1,400 rpm
Connected load	230 V, 14 A, 50 Hz	230 V, 14 A, 50 Hz

Product characteristics

- Single-part Roto-Mold-chassis and therefore extremely stable and robust
- Integrated trolley takes steps and rough ground in its stride
- Integrated hose drum with foldable crank (TS T)
- 5 m power lead with cable reel
- Storages for trigger gun with safety catch and lances
- Total-Stop system
- Low pressure detergent





Features & Equipment

Steel braided high-pressure hose, 15 m (NW 6), trigger gun with safety catch M2000, Dirtkiller lance with stainless steel pipe, Vario-Jet lance with stainless steel pipe





Product characteristics

- Single-part Roto-Mold-chassis and therefore extremely stable and robust
- Integrated trolley takes steps and rough ground in its stride
- Integrated hose drum with foldable crank
- 5 m power lead with cable reel
- Storages for trigger gun with safety catch and lances
- Total-Stop system
- Water tank, detachable
- Low pressure detergent



Product characteristics

- Integrated trolley takes rough ground in its stride with large wheels with wide solid rubber tyres
- Storage for trigger gun with safety catch and lances
- Shock absorbing buffers, front and
- Total-Stop system
- Additional electrical over-current protection (from mid-sized series)
- Water tank
- High pressure detergent







The Profi series

The Profi series exclusively uses oversized gears and oil housings which significantly extend the service life during rough continuous operation.



Profi 160 TS T



For more

rofi 160 TS T	Profi 175 TS

Ord. no.	41,230 1	41,232 1
Operating pressure, continuously adjustable	30-140 bar (3-14 MPa)	30-150 bar (3-15 MPa)
Max. admissible overpressure	160 bar (16 MPa)	175 bar (17.5 MPa)
Water output	11 l/min (660 l/h)	12 l/min (720 l/h)
Motor speed	1,400 rpm	1,400 rpm
Connected load	230 V, 14.3 A, 50 Hz	400 V, 7.2 A, 50 Hz



Profi 175 TS T

Features & Equipment

Steel braided high-pressure hose, 15 m (NW 6), trigger gun with safety catch M2000, Dirtkiller lance with stainless steel pipe, stainless steel lance with flat jet nozzle

High-performance and robust

The quadro series

The Kränzle quadro series combines all advantages from the Profi series and, due to its double axle chassis and its 4 wheels, sets a new benchmark in stability.





For more

	quadro 11/140 TS T	quadro 799 TS T	quadro 1200 TS T
Ord. no.	40,4411	40,432	40,4220
Operating pressure, continuously adjustable	30-140 bar (3-14 MPa)	30-180 bar (3-18 MPa)	30-180 bar (3-18 MPa)
Max. admissible overpressure	155 bar (15,5 MPa)	200 bar (20 MPa)	200 bar (20 MPa)
Water output	11 l/min (660 l/h)	13 l/min (780 l/h)	19 l/min (1.140 l/h)
Motor speed	1.400 rpm	1.400 rpm	1.400 rpm
Connected load	230 V, 14 A, 50 Hz	400 V, 8.5 A, 50 Hz	400 V, 12 A, 50 Hz

Features & Equipment

Steel braided high-pressure hose, 15 m (NW 6) (11/140 TS T), 20 m (NW 6) (799 TS T), 20 m (NW 8) (1200 TS T), trigger gun with safety catch, M2000 (11/140 TS T, 799 TS T), Starlet (1200 TS T), Dirtkiller lance with stainless steel pipe (11/140 TS T, 799 TS T), Turbokiller lance with stainless steel pipe (1200 TS T) stainless steel lance with



With its high working pressure and enormous water output of up to

2,400 l/h, the L series ensures first

high washing performance.

class results for applications with a



Product characteristics

- Extremely stable and robust roto-mold trolley
- Integrated trolley takes steps and rough ground in its stride
- Corrosion resistant material
- Integrated hose drum with foldable crank
- 7.5 m power lead with cable reel
- Trigger gun with safety catch and quick release system
- Total-Stop system

Proven technology in a new design

The new bully

With its convincing performance, its comfortable equipment and its extremely compact dimensions the new Kränzle bully is engineered to set standards in the upper Profi class.

For more

bully 980 TS T






bully 980 TS T bully 1180 TS T

Ord. no. with hose drum	40,350	40,351
Operating pressure, continuously adjustable	30-180 bar (3-18 MPa)	30-160 bar (3-16 MPa)
Max. admissible overpressure	200 bar (20 MPa)	180 bar (18 MPa)
Water output	16 l/min (960 l/h)	19 l/min (1,140 l/h)
Motor speed	1,400 rpm	1,400 rpm
Connected load	400 V, 11.5 A, 50 Hz	400 V, 11.5 A, 50 Hz

Features & Equipment

Steel braided high-pressure hose 15 m (NW 8), trigger gun with safety catch M2000 with quick release coupling, Dirtkiller lance 1000 mm with stainless steel pipe and quick release nipple, stainless steel lance 1000 mm with flat jet nozzle and quick release nipple

bully 1180 TS T



Cleanliness is one of the elementary prerequisites in farming and husbandry when it comes to health, hygiene and first class working conditions. As regards the cleaning of stables, a high washing performance is required which can only be achieved by the use of machines which above all, in addition to sufficient water pressure, also provide an adequate water output.

The new L series

Modular system: Simply arrange your L series according to your requirements.

In addition, Kränzle also offers five stationary cold water models.





L 30/200 TS

L 30/200 TS

	-
Ord. no.	40,800
Operating pressure, continuously adjustable	30-200 bar (3-20 MPa)
Max. admissible overpressure	230 bar (23 MPa)
Water output	30 l/min (1,800 l/h)
Connected load	400 V. 24 A. 50 Hz

Product characteristics

- Trolley made of stainless steel with integrated crane hook in the pipe frame
- Integrated trolley takes rough ground in its stride with large wheels with wide solid rubber tyres
- Stainless steel cover, brushed
- Stainless steel-storage for trigger gun with safety catch and lances
- Stainless steel-shock absorbing buffers
- Stainless steel electrical terminal
- Additional electrical over-current
- Total-Stop system with delayed motor cut-out

Features & Equipment

Steel braided high-pressure hose 15 m (NW 10), trigger gun with safety catch with quick-action coupling, stainless steel lance with flat jet nozzle and plug-in nipple





Product characteristics

- The integrated trolley takes rough ground in its stride with its failsafe wheels (except for portable design)
- Chassis made of stainless steel (except for portable design)
- Integrated hose drum with foldable crank (option)
- Service-friendly Honda engine
- Automatic speed control (option)



Product characteristics

- Integrated trolley takes rough ground in its stride
- Large wheels with wide solid rubber tyres
- Integrated hose drum with foldable crank
- Storages for trigger gun with safety catch and lances
- Large exhaust protection cover
- Shock absorbing buffers, front and rear
- Parking brake
- Water inlet filter

The off-road and site kit

The Profi-Jet series

The integrated trolley takes rough ground in its stride with its fail-safe wheels. Service-friendly Honda engine.



Profi-Jet B 13/150







Profi-Jet B 16/220

Features & Equipment

Steel braided high-pressure hose (NW 8), trigger gun with safety catch, M2000 (B 13/150), Starlet (B 16/220), stainless steel lance with regulating nozzle and water inlet filter

Independent and powerful

The complete kit for cleaning anywhere

The compact units impress through their powerful performance. Owing to their four large wheels with solid rubber tires they qualify for any outdoor type applications.



For more

B 170 T



	B 170 T	B 270 T
Ord. no.	41,190 1	41,193 1
Operating pressure, continuously adjustable	30-150 bar (3-15 MPa)	30-250 bar (3-25 MPa)
Max. admissible overpressure	170 bar (17 MPa)	270 bar (27 MPa)
Water output	12,5 l/min (750 l/h)	16 l/min (960 l/h)
Power data of the motor	5.5 HP petrol Honda	13 HP petrol Honda
Weight	68 kg	93 kg




B 270 T

Features & Equipment

Steel braided high-pressure hose 20 m (NW 8), trigger gun with safety catch, M2000 (B 170 T), Starlet (B 270 T) Turbokiller lance with stainless steel pipe, stainless steel pace with regulating nozzle, water intake filter



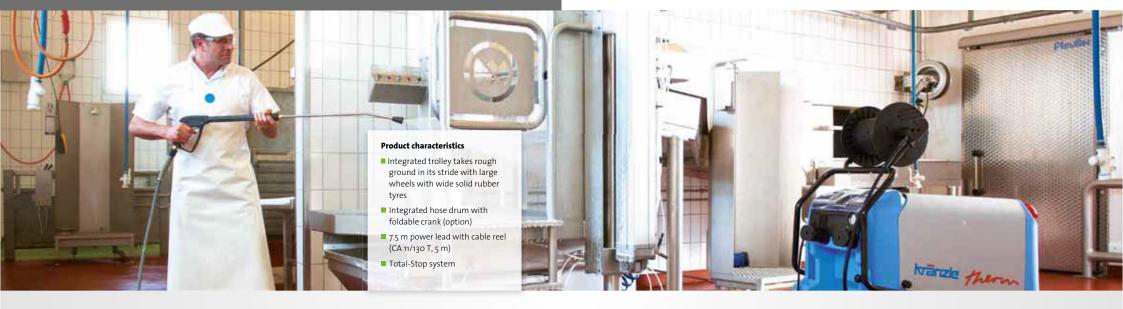

Oil-heated and compact with the highest safety

The therm series



therm CA 11/130 T therm CA 12/150 T



therm C 13/180 T



therm C 15/150



Steel braided high-pressure hose NW 8, trigger gun with safety catch M2000, one piece with lance and fl at jet nozzle, water inlet filter.

	therm CA 11/130 T	therm CA 12/150 T	therm C 13/180 T	therm C 15/150
Ord. no.	41,4601	41,461 1	41,441 1	41,440
Operating pressure, continuously adjustable	30-130 bar (3-13 MPa)	30-150 bar (3-15 MPa)	30-180 bar (3-18 MPa)	30-150 bar (3-15 MPa)
Max. admissible overpressure	145 bar (4.5 MPa)	170 bar (17 MPa)	200 bar (20 MPa)	170 bar (17 MPa)
Water output	11 l/min (660 l/h)	12 l/min (720 l/h)	13 l/min (780 l/h)	15 l/min (900 l/h)
Hot water output temperature	12-82 °C	12-80 °C	12-80 °C	12-80 °C
Connected load	230 V, 15.0 A, 50 Hz	400 V, 7.2 A, 50 Hz	400 V, 8.7 A, 50 Hz	400 V, 8.7 A, 50 Hz



therm 895-1 T therm 1165-1 T

therm 895-1 T therm 1165-1 T 41,352 1 41,353 1 Operating pressure, continuously adjustable 30-195 bar (3-19.5 MPa) 30-165 bar (3-16.5 MPa) Max. admissible overpressure 215 bar (21.5 MPa) 180 bar (18 MPa) Water output 14.9 l/min (895 l/h) 19.4 l/min (1.165 l/h) Hot water output temperature 12-86 °C 12-82 °C Connected load 400 V, 12 A, 50 Hz 400 V, 12 A, 50 Hz

The Kränzle therm hot water high-pressure cleaners combine a number of technical innovations by Kränzle that contribute to reliable operation, safety of the equipment and not least operating and servicing.

The Kränzle therm cleaners are extremely safe to operate, kind to the environment, clean and quiet. The Kränzle therm high-pressure cleaners represent the state-of-the-art in equipment and safety.

Furthermore, Kränzle also offers seven stationary models.

For more

They come in 30 mobile models 22 oil heated, 8 electric) as well as 7 stationary models



Features & Equipment

Steel braided high-pressure hose NW 8, trigger gun with safety catch Starlet, stainless steel lance with fl at jet nozzle, water inlet filter





Compact, agile and high-performing

The Kränzle Ventos wet and dry vacuum cleaners



Ventos 30 E/L

Product characteristics

- Folding ergonomically shaped carrying handle
- Large wheels with rigid steel axle
- Power tool electrical socket with switch-on and cut-out delay
- Electronic suction power control
- 7.5 m rubber-coated power lead with cable reel
- Exhaust air ventilation connection
- Cut-out electrodes

For more



Ord. no.	58,391 0	58,393 o
Power intake / Appliance socket	400 - 1200 W / 2400 W	400 - 1200 W / 2400 W
Volume fl ow max. (turbine)	3,700 l/min	3,700 l/min
Container volume	17 l	32 l
Max. filling volume when vacuuming water	approx. 6 l	approx. 17 l

Features & Equipment

Suction hose Ø 36 mm x 3.5 m, floor nozzle, with separate rubber lips for wet vacuum cleaning, 2 extensions 500 mm each, stainless steel, upholstery nozzle, suction brush

Practical and diverse

Accessories for high-pressure cleaners







Water inlet filter		Pipe cleaning hoses with nozzle			Foam injector	
	ter outlet de of brass	0	NW 5 min. 10 l/min max. 19 l/min min. 120 bar (12 MPa) max. 200 bar (20 MPa) max. 60 °C	Abb. 13.390 1	Adjustable dosage (5 settings) max. volume flow 1.25 nozzle 12 l/min max. volume flow 1.80 nozzle 27 l/min min. 70 bar (7 MPa) max. 250 bar (25 MPa) max. 80 °C	

Perfect cleanliness not only for home and yard

The hand powered **sweepers**



Kränzle 2+2

	Kranzle 2+2	Kranzle 1+1
Ord. no.	50,76	50,077
Working width	800 mm	670 mm
Volume storage bin	40 l	40 l
Weight	16 kg	24 kg

Product characteristics

- Storage bin and housing made of impact-proof plastic
- Extra large wheels with natural rubber tyres for optimum transmission of driving force
- Feeder brushes and roller brushes made of extremely abrasion-proof

For more







Kränzle is setting high standards:

Outstanding quality and technical perfection!

High-pressure cleaners, industrial vacuum cleaners and hand powered sweepers – that is the world of Kränzle. Founded in 1974 the Kränzle enterprise has developed into a worldwide quality leader of high-pressure cleaners.

And there is good reason for this. Because, from the start, Kränzle has attached great importance to the highest quality, e.g. with regard to the selection of a forged special type of brass for its high-pressure pumps or the ceramic coating of the pump plungers - top quality is the uncomprisingly clear brand standard. Based on values such as quality, fl exibility and innovation, we continuously focus on the further development of our company and product solutions.











I. Kränzle GmbH

Elpke 97 33605 Bielefeld (Germany)

Telefon: +49 (0) 521 / 9 26 26-0 Telefax: +49 (0) 521 / 9 26 26-40

info@kraenzle.com

Presented by your authorized Kränzle partner:



Liam Chawke Electrical & Water Treatment

Bank Place Rathkeale Co Limerick

P: **069-64318**

E: info@liamchawke.ie W: www.liamchawke.ie

Made

i

Germany