



Cold water high-pressure cleaners



The new bully

Compact power!

Specialist equipment for professionals!

■ Made
■ in
■ Germany

The new bully:

Tried and tested technology in a new design!

With its impressive power, comfortable equipment and very compact dimensions, the new Kränzle bully takes control over the playground, setting standards in the upper professional class.

The Kränzle pump and motor used here have already proven their worth in our other series. Now available in a new smaller, tough and simple exterior it is well protected. The gentle curves of the top and front handles ensure easy and comfortable handling and stylish looks.

Its compact size is characterised decisively by a sophisticated chassis and casing constructed of only two rotationally moulded parts offering robustness and ensuring that access to the pump and motor for servicing is quick and easy.

The new Kränzle bully is the outstanding solution for cleaning in agriculture, industry and crafts, as well as in many other industries where performance and reliability are essential along with a compact space saving design.

- Space-saving, compact and service-friendly design
- Extremely stable and robust Roto-Mold trolley
- Integrated trolley takes steps and rough ground in its stride
- Simple and comfortable handling
- Corrosion-resistant materials
- Integrated hose drum with foldable crank
- 7,5 m power lead with cable reel
- Trigger gun with safety catch and quick release system
- Dirtkiller lance with stainless steel pipe and quick release nipple
- Stainless steel lance with flat jet nozzle and quick release nipple
- Storage for trigger gun with safety catch and lance
- Total-Stop system
- Shock absorbing buffers





Tried and tested technology


Pump head manufactured by Kränzle from forged special brass. Driven by our own slow-starting, slow-running, silent and durable four pole 1,400 rpm electric motor for long and frequent times of use.



Space-saving and compact design

A sophisticated chassis and cover constructed of only two corrosion-resilient rotationally moulded parts ensures a small size and provides quick and easy access for servicing.

Dimensions in mm (L x W x H): 730 x 425 x 970

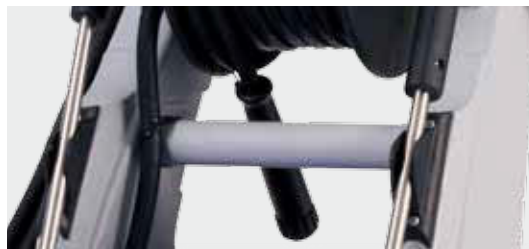

Remarkably stable

Feet with rubber buffers integrated into the Roto-Mold chassis ensures good stability in its natural position.



Fully loaded

Equipped with an integrated hose drum with foldable crank, trigger gun with safety catch with Dirtkiller lance and stainless steel lance with flat jet nozzle with quick release fittings.



Technical specifications	bully 980 TS T	bully 1180 TS T	bully 980 TS	bully 1180 TS
Ord. no. with hose drum	40.350	40.351	–	–
Ord. no. without hose drum	–	–	40.350 1	40.351 1
Operating pressure, continuously adjustable	30-180 bar (3-18 MPa)	30-160 bar (3-16 MPa)	30-180 bar (3-18 MPa)	30-160 bar (3-16 MPa)
Max. admissible overpressure	200 bar (20 MPa)	180 bar (18 MPa)	200 bar (20 MPa)	180 bar (18 MPa)
Water output	16 l/min (960 l/h)	19 l/min (1.140 l/h)	16 l/min (960 l/h)	19 l/min (1.140 l/h)
Inlet water temperature	60 °C	60 °C	60 °C	60 °C
Suction height	2.5 m	2.5 m	2.5 m	2.5 m
Nozzle size, Dirtkiller	● 055	● 075	● 055	● 075
Nozzle size, flat jet nozzle	● 25055	● 25075	● 25055	● 25075
Motor speed	1.400 rpm	1.400 rpm	1.400 rpm	1.400 rpm
Connected load	400 V, 11.5 A, 50 Hz	400 V, 11.5 A, 50 Hz	400 V, 11.5 A, 50 Hz	400 V, 11.5 A, 50 Hz
Power intake / Power output	7.0 kW / 5.0 kW	7.0 kW / 5.0 kW	7.0 kW / 5.0 kW	7.0 kW / 5.0 kW
Weight	68 kg	68 kg	65 kg	65 kg
Dimensions (L x W x H)	730 x 425 x 970 mm	730 x 425 x 970 mm	730 x 425 x 970 mm	730 x 425 x 970 mm

Features & Equipment	bully 980 TS T	bully 1180 TS T	bully 980 TS	bully 1180 TS
Steel braided high-pressure hose, 15 m NW 8	(44.879)	(44.879)	–	–
Steel braided high-pressure hose, 10 m NW 8	–	–	(44.878)	(44.878)
Trigger gun with safety catch M2000 with quick release coupling	(12.492)	(12.492)	(12.492)	(12.492)
Dirtkiller lance 1000 mm with stainless steel pipe and quick release nipple	(12.425-055)	(12.425-075)	(12.425-055)	(12.425-075)
Stainless steel lance 1000 mm with flat jet nozzle and quick release nipple	(12.420-D25055)	(12.420-D25075)	(12.420-D25055)	(12.420-D25075)

vma-werbeagentur.de



The new Kranzle website:
 360° product views, benefits arguments,
 FAQs and lots more.
www.kraenzle.com

I. Kranzle GmbH

Elpke 97
 33605 Bielefeld (Germany)

Phone: +49 (0) 521 / 9 26 26-0
 Telefax: +49 (0) 521 / 9 26 26-40

info@kraenzle.com

Provided by your authorised Kranzle-Partner:

Liam Chawke Electrical & Water Treatment
 Bank Place
 Rathkeale
 Co Limerick
 P: **069-64318**
 E: info@liamchawke.ie
 W: www.liamchawke.ie

■ Made
 ■ in
 ■ Germany

Kranzle 2013, Ord. no. 30.701.00
 Subject to technical modifications and errors.